


Miniflex™ Outdoor Microduct

Authorized Partner



Enquiry Information: Code Builder

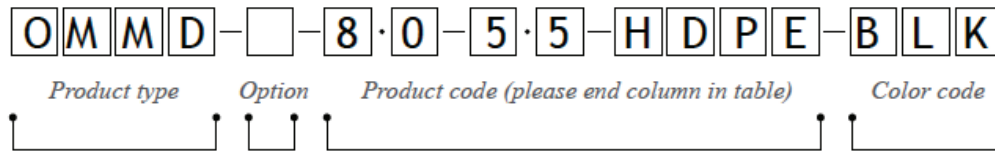

Product Type

OMMD = Optical Fiber Miniflex™ Microduct

Option

P = Pullcord

Unique Product Code

e.g. 8.0-5.5-HDPE
(end column)

Color Code

(check availability)
BLK = Black

Miniflex™ Outdoor Microduct Product List

Material	OD (mm)	ID (mm)	Crush (n)	Tension (n)	Nominal Weight (kg/km)	Bend Radius (Passive)	Bend Radius (Active)	Install Temp (Celsius)	Product Code
HDPE	8.0	5.5	450	300	24.7	10x OD	5x OD	-10 to +60	8.0-5.5-HDPE
	10	6.0	1000	500	36.8	10x OD	5x OD	-10 to +60	1.0-6.0-HDPE

Environmental Conditions:

- Operating Temperature: -10°C / +60°C

Options:

Pullcord - A pull cord can be specified to enable easy population of the protection tube if required